




# DOSATRON®

WATER POWERED DOSING TECHNOLOGY

# 60 m<sup>3</sup>/h

## D 60 S - 0.1 - 0.65 %



### SPECIFICATIONS

- Injection Range : **0.1 - 0.65 %**  
[1 : 1000 - 1 : 154]
  - Water flow range\* : **10 m<sup>3</sup>/h - 60 m<sup>3</sup>/h**  
[166.66 l/mn - 1000 l/mn]  
[44 US GPM - 264 US GPM]
  - Operating pressure : **0.5 - 10 bar**  
[7 - 145 PSI]
  - Concentrated additive injection : **10 l/h - 390 l/h**  
[0.044 US GPM - 1.72 US GPM]
- \* For operating unit with other fluids than water, please contact us

### A unique technology associating all dosing functions

#### Dosing Technique :

Non-electric proportional

#### Energy Source :

Water flow and pressure

#### Integrated functions :

- **Metering** : volumetric hydraulic motor
- **Injecting** : continuous proportional injection of liquid or soluble concentrate
- **Regulating** : proportionality servo-controlled by the water flow
- **Mixing** : integrated mixing

#### Contents package 1:

1 Dosatron, 1 transparent suction hose 180 cm [71"] - Ø 20 X 27 mm [7/8" id X 1 1/16" od], 1 owner's manual.

#### Contents package 2:


1 bi-turbo bloc, 1 set of pipes, 1 anti-rotation plate with nuts, 1 "universal" key, 1 angle pipe (inlet)



# 60 m<sup>3</sup>/h – 0.1 – 0.65 %

## Operating principle

Installed directly in the water supply line, the Dosatron operates by using the flow of water as the power source. The water activates the Dosatron, which takes up the required percentage of concentrate directly from the container and injects it into the water. Inside the Dosatron, the concentrate is mixed with the water, and the water pressure forces the solution downstream. The dose of concentrate will be directly proportional to the volume of water entering the Dosatron, regardless of variations in flow or pressure, which may occur in the main line.

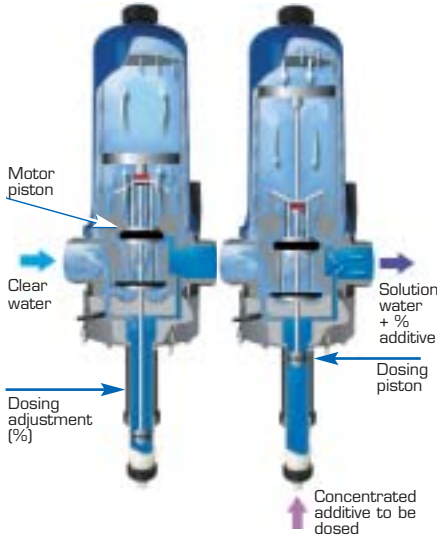

## Proportional injection externally adjustable



Partially unscrew the black nut. Turn the dosing stem. Put the chosen rate on the black mark of the transparent ring. The amount of injected concentrate

is proportional to the amount of water coming into the Dosatron : i.e. Adjustment at 1% = 1 : 100 = 1 Volume of concentrate into 100 Volumes of water.



## Dosatron, a complete range

Dosatron develops, manufactures and markets a unique dosing technology that allows any liquid or soluble concentrate to be continuously and proportionally injected and mixed into water.

## The 60 m<sup>3</sup>/h range

REF.	DOSAGE	PRESSURE
ADJUSTABLE		
D 60 S	0.1 - 0.65 %	0.5 - 10 bar

Other product lines available to treat water flows up to 1.5 m<sup>3</sup>/h, 2.5 m<sup>3</sup>/h, 4.5 m<sup>3</sup>/h, 8 m<sup>3</sup>/h, 20 m<sup>3</sup>/h, 30 m<sup>3</sup>/h,....  
For special models, accessories and particular systems: please consult us.

## Specifications

General	
- Maximum operating water temperature :	40° C [104° F]
- Minimum operating water temperature :	5° C [41° F]
- Dosing rate :	i.e. Adjustment at 1 % = 1:100 = 1 V concentrate into 100 V water
- Average dosing accuracy :	+/- 5 % (Charts on demand)
- Repeatability :	+/- 3 % (API standard)
- Pressure loss :	0.12 - 0.88 Bar [1.74 - 12.76 PSI] (depending on operating conditions)
Other integrated functions	
- Internal motor filter :	inlet filter
- Inlet/Outlet :	2 1/2" male Ø 66 x 76 mm
- Built-in by-pass :	yes
- Built-in airbleeder :	yes
- Built-in anti-siphon device :	yes
Motor	
- Motor :	double action differential hydraulic piston
- Motor capacity :	~ 5 l [1.32 US Gallons] (1 cycle)
- Mixing chamber :	yes
Dosage	
- Injection :	pre-dilution at the outlet
- Dosing piston :	simple action, injection on the upstream
- Injection check valve :	double diaphragm check-valve
Suction	
- Self-priming :	yes
- Maximum viscosity of concentrate :	400 cSt at 20° C [68° F]
- Maximum vertical or horizontal suction of the concentrate :	4 m [13 ft]
- Strainer :	yes - foot strainer

## Markets

Environment – Hygiene – Water treatment – Vehicle wash – Metal processing – Food processing – Graphic Arts – Horticulture – Livestock...

## Principal applications :

Medication – Disinfecting – Cleaning – Fertigation – Phytosanitation – Supplementation – Lubrication – PH/TH Correction – Sanitation – Flocculation – Vehicle wash...

## Installation

**Regulations :** Refer to local water regulations, prior to installing your Dosatron.


### To optimize your Dosatron, we advise to :

- Install a filter (300 mesh [60 microns]) upstream, depending on your water quality.
- Change the dosing seals once a year.
- Rinse as often as possible with clear water.
- Turn off the water supply and allow the pressure to drop to zero before adjusting the injection rate.
- Install necessary protections for excess flow, excess pressure and water hammer (anti-hammer flow/pressure device).
- Install your Dosatron on a total by-pass line.

For all other installation advice, please consult us.

## Size :

- Package size 1 : 98 X 42 X 33 cm [ 38 9/16" X 16 1/2" X 13"]
- Package size 2 : 61 X 66 X 44 cm [24" X 26" X 17 1/2"]
- Package weight 1 : ~ 22 kg [~ 49 US lbs]
- Package weight 2 : ~ 43 kg [~ 98 US lbs]

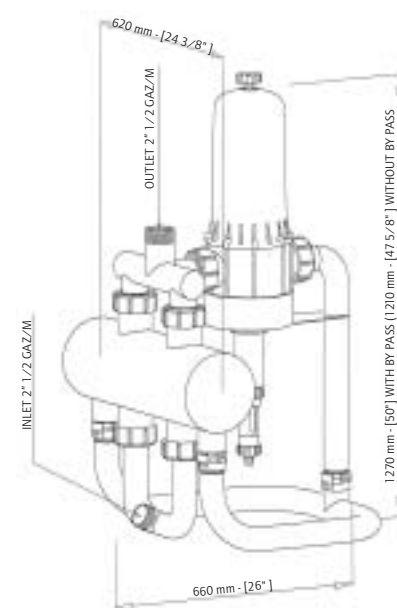

## Standard material

- Housing : polypropylene, PVC, Aluminium
- Motor piston : polypropylene, polyamide, EPDM, stainless steel
- Injection area : polypropylene, polyethylene, PVC
- Injection hose : PVC reinforced

## Available options

(■ : Option ● : standard ★ : not available for this model)

### Optimized compatibility

- ★ AF : Recommended seals for alkaline concentrate
- VF : Recommended seals for acid concentrate
- ★ PVDF : Housing
- ★ H : Hastelloy plunger rod
- ★ IE : External injection
- ★ V : Kit for viscous concentrate
- ★ Injection hose : Special material hose and foot strainer available

### Optimized installation

- BP : integrated by-pass
- ★ Other fittings
- ★ Strap
- ★ Support legs
- Other : please contact us



Integrated by-pass : allowing turning concentrate injection on and off.

These options allow adapting your Dosatron to your needs. Contact our technical service to help determine what option you may need.

PATENTED PRODUCTS  
Each Dosatron unit is factory tested.

CUSTOMER SERVICE - SERVICE CLIENTÈLE

FT/D60S-CB/06/03

## DOSATRON INTERNATIONAL

Rue Pascal - B.P. 6 - 33370 TRESSES (BORDEAUX) - FRANCE

Tel. 33 (0)5 57 97 11 11 - Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85

e.mail : info@dosatron.com - http://www.dosatron.com

S.A. DOSATRON INTERNATIONAL au capital de 3 050 000 EUROS - SIRET BORDEAUX 418 826 822 00011 - APE 291 B - N° TVA/VAT : FR96418826822

This document does not form a contractual engagement on the part of Dosatron International and is for information only. Dosatron International reserves the right to alter product specification or appearance without prior notice. © DOSATRON INTERNATIONAL S.A. 2003.